



**TYPICAL SECTION**

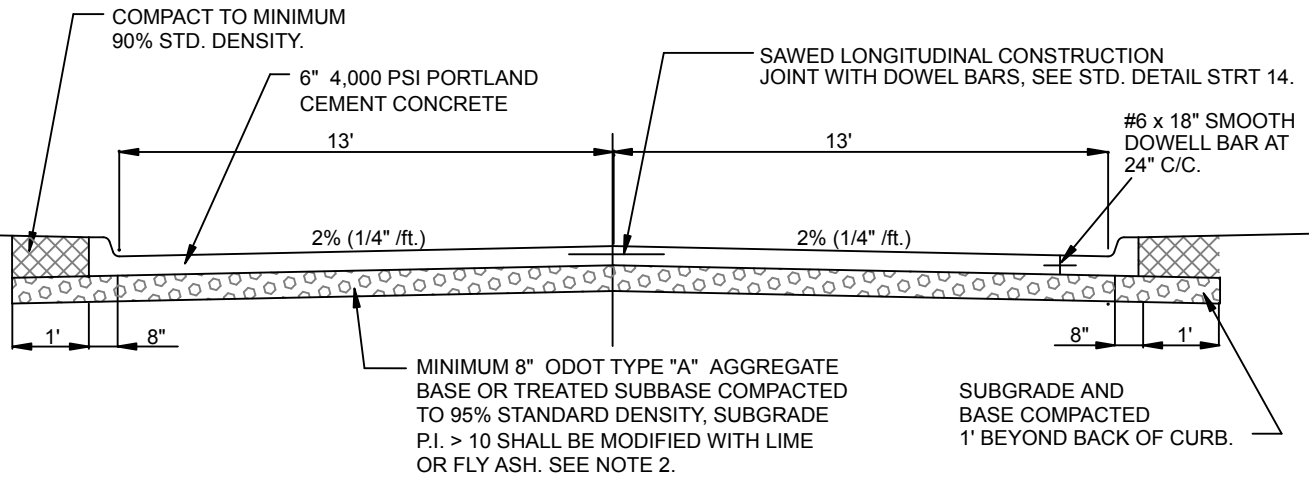

**CONCRETE STREET SECTION**

HALF SECTION  
INTEGRAL CURB & PAVEMENT

HALF SECTION  
SEPARATE PLACEMENTS

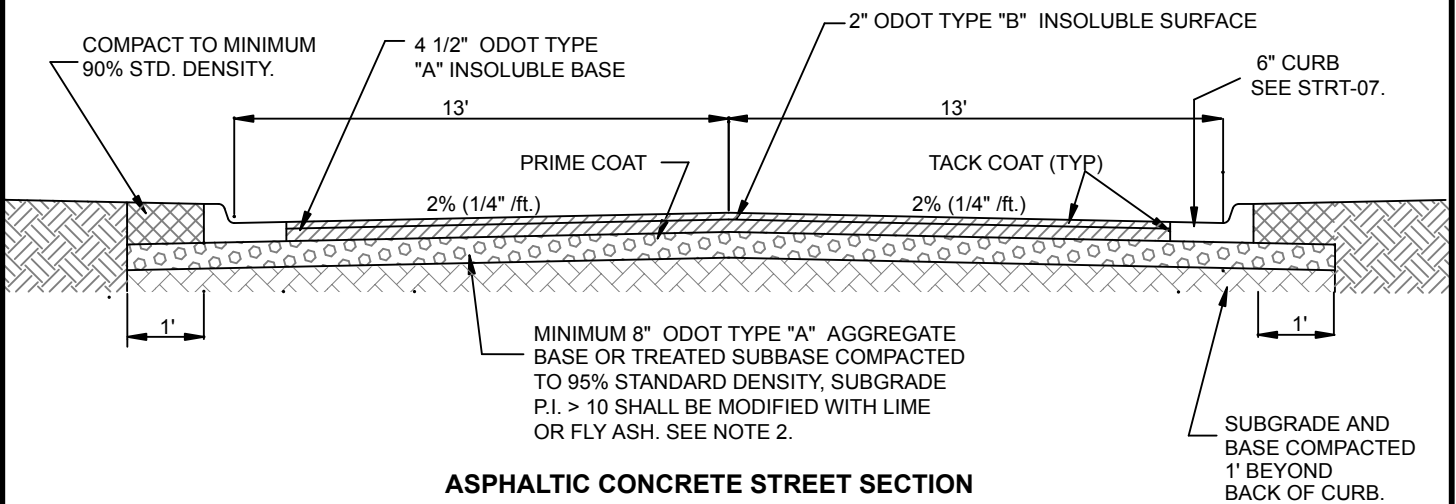

**ASPHALTIC CONCRETE STREET SECTION**

**NOTES:**

1. SECTIONS SHOWN ARE MINIMUM REQUIRED. SUBGRADE MAY REQUIRE ADDITIONAL THICKNESS OF MODIFICATION OR A SUBBASE DRAINAGE SYSTEM WHERE SEVERE SOIL CONDITIONS EXIST.
2. FOR EXISTING SUBBASE MATERIAL WITH PI <10 SUBGRADE SHALL BE CLASSIFIED SELECT, INERT MATERIAL OR STABILIZED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY.
3. ASPHALT SURFACES SHALL CONFORM TO ODOT STANDARD 401.04 FOR TOLERANCES AND STANDARD DETAIL STRT-08 FOR TEXTURE.
4. IF A COMPACTED AGGREGATE SUBBASE IS USED, THE AGGREGATE SHALL BE PLACED ON SEPARATOR FABRIC.

| REVISION | BY | DATE | <b>RESIDENTIAL MINOR STREET<br/>STANDARD DETAILS</b> |                      |
|----------|----|------|--|----------------------|
|          |    |      | CITY OF OWASSO, OKLAHOMA                             |                      |
|          |    |      | PUBLIC WORKS DEPARTMENT<br>ENGINEERING DIVISION      |                      |
|          |    |      | DATE: 05/05  | STANDARD NO. STRT-01 |

:STANDARD DETAILS\STREETS\STRT-01