



TYPICAL SECTION

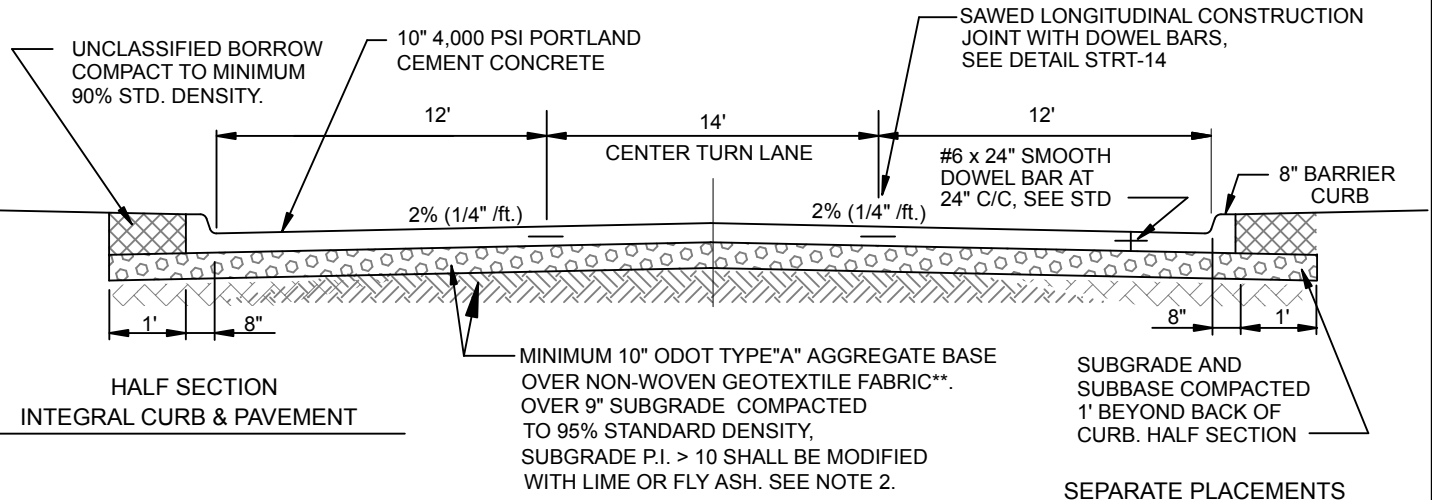

CONCRETE STREET SECTION

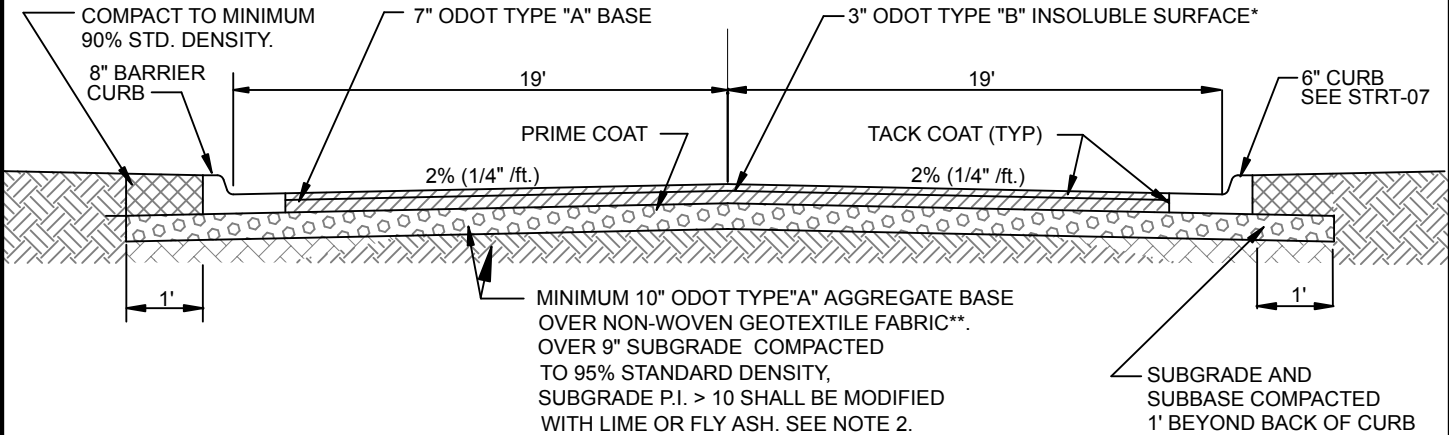

ASPHALTIC CONCRETE STREET SECTION

NOTES:

1. SECTIONS SHOWN ARE MINIMUM REQUIRED. SUBGRADE MAY REQUIRE ADDITIONAL THICKNESS OF MODIFICATION OR A SUBBASE DRAINAGE SYSTEM WHERE SEVERE SOIL CONDITIONS EXIST.
2. FOR EXISTING SUBGRADE MATERIAL WITH PI <10 SUBGRADE SHALL BE CLASSIFIED SELECT, INERT MATERIAL OR STABILIZED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY.
3. ASPHALT SURFACES SHALL CONFORM TO ODOT STANDARD 401.04 FOR TOLERANCES AND STANDARD DETAIL STRT-08 FOR TEXTURE.
4. IF A COMPACTED AGGREGATE SUBBASE IS USED, THE AGGREGATE SHALL BE PLACED ON SEPARATOR FABRIC.

**5. GEOTEXTILE FABRIC SHALL BE CONTECH C-80NW OR EQUIVALENT.
 *6. OKLAHOMA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.

| REVISION | BY | DATE | COMMERCIAL/ INDUSTRIAL COLLECTOR STREET STANDARD DETAILS | |
|-------------|----|------|---|--|
| | | | | |
| DATE: 05/05 | | | STANDARD NO. STRT-03A | |

:STANDARD DETAIL\STREET\STRT-03A.DWG